

ASTM TEST DATA

Physical Property	Test Code	Results
Compression Strength	C-170	12,152 PSI
Flexural Strength	C-880	1,683 PSI
Abrasion Resistance	C1353-96	21.36
Water Absorption		<5%
Slip Resistance	C-1028	0.80
Frost Resistance	(freeze/thaw test)	Passed

SIZES

Standard sizes include: 24" x 24" and 12" x 24"


Custom sizes available upon request.

DOMES SPACING


The detectable warning surface consists of truncated domes on a square pattern which are typically arranged in either of two configurations:

1. Diagonal Alignment
2. Parallel Alignment

Both configurations can comply with ADAAG specifications for detectable warnings. Depending on which configuration is used, the rows of domes will be aligned with, or at a 45 degree angle to the curb or platform and the direction of travel.

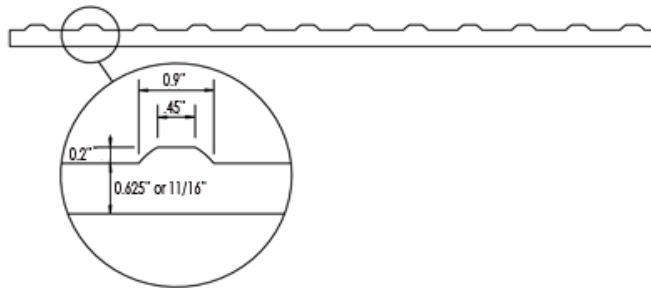

Tiles are 11/16" thick.

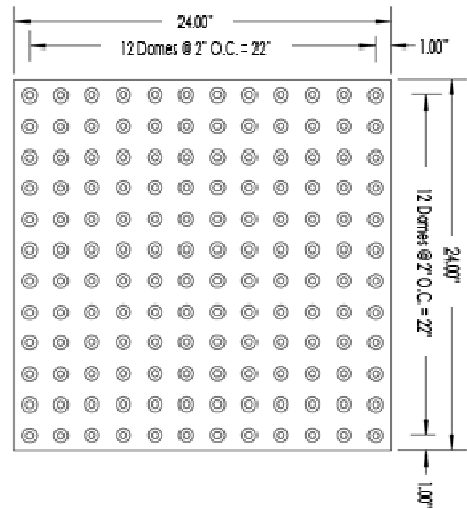

COLORS

Standard colors* include: Yellow, Black, Sedona Red & Brown



*Colors shown are approximate. Please refer to sample for actual color. Custom colors available upon request.

Please visit www.getsuredome.com for more information.